


## DS-6301/6304/6308DI Decoder

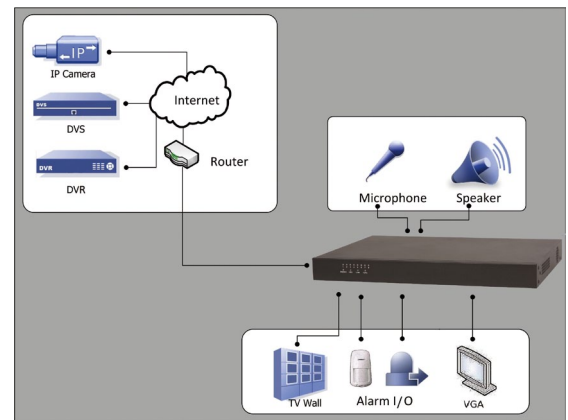

### Key features

- H.264 and MPEG4 video stream supported
- Up to 1280×720P resolution decoding
- Up to 4-ch VGA and 8-ch BNC outputs
- SADP(IP Finder), UDP, RTP and NTP protocols
- 32 users with multi-user level management

### Rear Panel of DS-6308DI



1. Video/audio out
2. Line in
3. Line out
4. Audio-1 to audio-4
5. VGA
6. RS232
7. LAN
8. RS-485
9. Alarm in
10. Alarm out
11. Power switch
12. GND

### Specifications

	DS-6301DI	DS-6304DI	DS-6308DI
<b>Video/Audio input</b>			
Two-way audio input	1-ch, BNC (2.0 Vp-p, 1 kΩ)		
<b>Video/Audio output</b>			
VGA output	1-ch	2-ch	4-ch
	Resolution: 1280×1024 /60 Hz, 1280×720 /60 Hz, 1024×768 /60 Hz		
Video output	1-ch BNC (1.0 Vp-p, 75 Ω)	4-ch BNC (1.0 Vp-p, 75 Ω)	8-ch BNC (1.0 Vp-p, 75 Ω)
Decoding resolution	720P / 4CIF / DCIF / 2CIF / CIF / QCIF		
Frame rate	720P: 25 fps (P) / 30 fps (N)		
Audio output	1-ch, BNC (Linear, 600 Ω)	4-ch, BNC (Linear, 600 Ω)	8-ch, BNC (Linear, 600 Ω)
Stream type	Video, Video & Audio		
<b>External interface</b>			
Network interface	1, RJ45 10M / 100M self-adaptive Ethernet interface		
Serial interface	1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface (for PTZ control)		
Alarm in	8		
Alarm out	8		
<b>General</b>			
Power supply	12 VDC		
Consumption	≤ 40 W		
Working temperature	-10 °C ~ +55 °C		
Working humidity	10% ~ 90%		
Dimensions (W × D × H)	440 x 44.5 x 320 mm		
Weight(without HDD)	≤ 5 kg		