

IR VARI-FOCAL DOME CAMERA

DI-380IPVF



Sony Exmor IMX138 1/3" CMOS
1.3 Mega-Pixel
True Day & Night (IR Cut Removable)
0 Lux (IR On) Min. Illumination
ONVIF


Digital WDR
3D Noise Reduction
BLC/HLC
Motion Detection and Privacy Masking
3.3-12mm Vari-Focal Lens

25m IR Illumination
PoE Support
1 Way Audio
IP 66 Protection

Specifications

Camera	Video	Model	DI-380IPVF
		Image Sensor	Sony Exmor IMX138 1/3" CMOS
		Effective Pixels	1280x1024
		Electronic Shutter	1/25s ~ 1/100000s
		Day & Night	ICR
		Min. Illumination	0lux (IR ON)
	Audio	Audio compression	G711A
		Communication	One Way Audio
	Image Enhancement	Image Settings	AWB, AES, AGC Adjustable Exposure Mode (Auto / Manual) BLC, HLC Adjustable Sharpness, Saturation, Brightness & Contrast Adjustable
		WDR Range	Digital WDR
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	Yes
		Motion Detection	Yes
		Video Compression	H.264
Compression	Resolution	960P (1280x960), 720P (1280x720), VGA (640x480), QVGA	
	Multi-stream	(320x240) *1280x960 (1~30fps) / 1280x720 (1~30fps) / 1280x720 (1~30fps) / 640x480 (1~30fps) / 320x240 (1~30fps)"	
	Bit rate	64Kbps ~ 4Mbps	
	Encode Mode	VBR/CBR	
	Image Quality	Five levels under VBR; Free adjustment under CBR	

Housing	IR Distance	25m (42 IR LED)
	Lens	3.3-12mm
	Iris	Fixed Iris
	Lens Mount	Φ14 mount
	Water-proof	IP66
	Bracket	3-Axis Ball
	Dimensions	Φ119mm×82mm
	Weight(gross)	669g
Connectivity	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	CVBS (BNCx1)
	Mic Connectivity	1Ch Input
	SD Card	No
	RS485	No
	Alarm	No
Network	Remote Monitoring	IE Browsing, CMS 2.0 Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	ONVIF	Yes
	Ethernet	100Mbps
Others	PoE	Yes
	Power Supply	DC12V/PoE
	Work Environment	-10 C ~50 C , 10%~90% Humidity

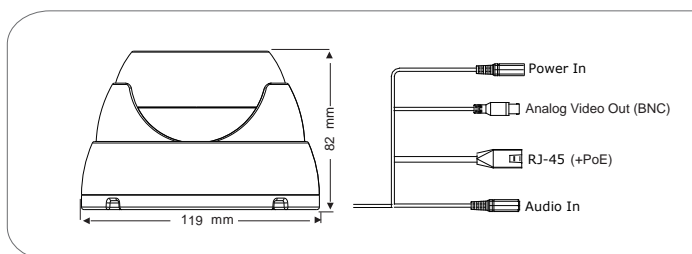

Junction Box is available